



M183-N TYPE 16BB Data Sheet

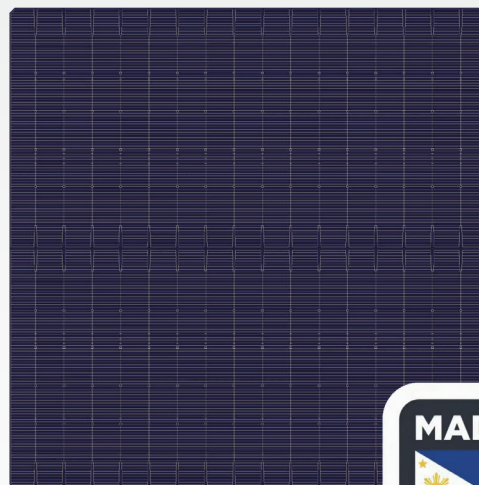

High conversion efficiency with high reliability

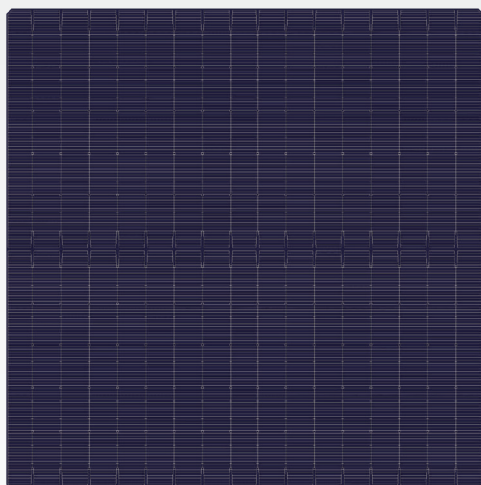

No light-induced degradation



Uniform cell performance with stable process control



Both sides can generate electricity



Low mismatch of cell performance during encapsulation



Excellent power generation performance under low irradiation



Low hot spot effect

SOLARIS PANABO

M183-N TYPE 16BB Data Sheet

TECHNICAL CHARACTERISTICS


Dimension	182.2mm*183.75mm±0.5mm/Φ256±0.5mm	TkVoltage:-0.25%/K
Thickness	130um±13um	TkCurrent:0.045%/K
Front	16*0.05±0.035mm bus bars(silver) black anti-reflecting coating(silicon nitride)	TkPower:-0.30%/K
Back(+)	0.05±0.035mm bus bars(silver) black anti-reflecting coating(silicon nitride)	Rsh≥50Ω,Irev2≤0.5A

LIGHT INTENSITY AND RELIABILITY


Intensity(W/m²)	Voc	Isc
1000	1.000	1.000
900	0.996	0.903
800	0.991	0.803
600	0.988	0.602
400	0.962	0.403

The VOC(ISC) tested by 1000W/m² is the standard, and the Voc (ISC) decreases with the strong decrease in light.

PRINTING GRAPHICS

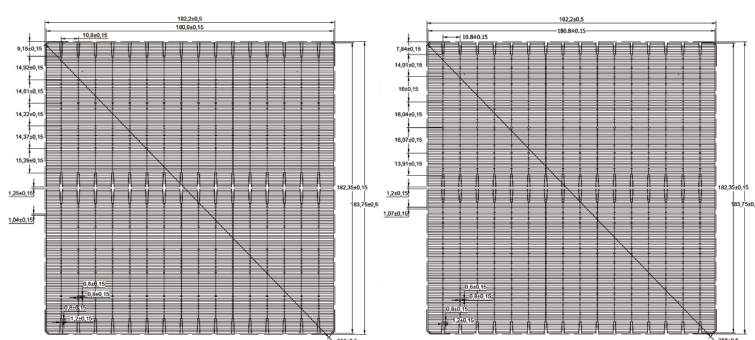

IV CURVE

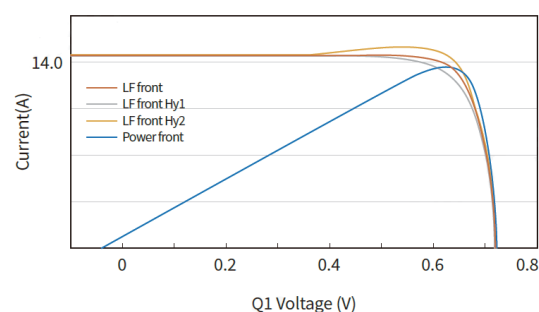

WELDABILITY

Minimum peeling intensity ≥0.5N/mm

Results may vary depending on the welding ribbon, welding methods and conditions.

ELECTRICAL CHARACTERISTICS

Eff(%)	Pmp(W)	Vmpp(V)	Impp(A)	Voc(V)	ISC(A)	FF(%)
26.0	8.70	0.639	13.62	0.738	14.11	83.57
25.9	8.67	0.638	13.59	0.737	14.09	83.48
25.8	8.64	0.637	13.56	0.736	14.08	83.33
25.7	8.60	0.636	13.53	0.735	14.06	83.24
25.6	8.57	0.635	13.49	0.734	14.05	83.09
25.5	8.54	0.633	13.48	0.732	14.04	83.07
25.4	8.50	0.632	13.45	0.731	14.03	82.90
25.3	8.47	0.631	13.41	0.730	14.01	82.75
25.2	8.43	0.630	13.38	0.730	14.00	82.60
25.1	8.40	0.629	13.36	0.729	13.99	82.40
25.0	8.37	0.626	13.36	0.727	13.98	82.32
24.9	8.33	0.624	13.35	0.726	13.97	82.19
24.8	8.30	0.621	13.36	0.725	13.96	82.03
24.7	8.27	0.620	13.33	0.724	13.95	81.86
24.6	8.23	0.618	13.32	0.723	13.94	81.70
24.5	8.20	0.616	13.31	0.721	13.93	81.65
24.4	8.17	0.615	13.28	0.719	13.91	81.66

ELECTRICAL CHARACTERISTICS

Eff(%)	Pmp(W)	Vmpp(V)	Impp(A)	Voc(V)	ISC(A)	FF(%)
24.3	8.13	0.614	13.25	0.718	13.89	81.55
24.2	8.10	0.613	13.21	0.717	13.88	81.39
24.1	8.07	0.612	13.18	0.716	13.87	81.23

STC:1000W/m²,AM1.5,25 °C /Specifications and data for reference only.